



Gainsha F3200II


Printing Results
High-Speed & High-Quality



Vibrant Color Screen



Extreme Wear
Resistance




Prints Super-Small
(15mm label)

Compliant with multiple certifications: CE FCC RoHS



(Default without screen, screen optional)

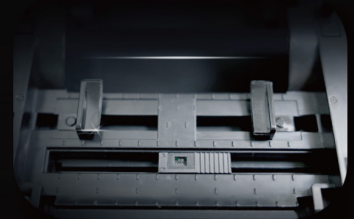

Centered printing, supports smaller labels



Gainsha F3200II

Dimensions (DxWxH)

200 x 146 x 143mm

Weight

1.3kg

Print Head Durability

50km

Certification

CE FCC RoHS

Printing Method

Thermal (Direct Thermal)

Printer Command
languages

ESC , TSPL

Heater Resolution

203dpi

Print Width

80mm

Interface

USB(standard); USB Bluetooth(optional); USB WiFi(optional);
USB Serial Port Ethernet(optional)

Media Width

15-85mm (With liner)

Media Type

Thermal sensitive bill paper;
thermal sensitive label paper;
thermal sensitive black label
paper (back)

Character Scaling/Rotation

Alacable Front. Rotation: 0°,
90°, 180°, 270°.

Paper Roll Core
Inner Diameter

25.4 mm

Max. Roll Outer
Diameter

100 mm

Direction

Front delivery

Power Input

DC24V 2.5A

Operation Environment

5°C to 45°C, 20% to 90%
RH (non-condensing)

Storage Environment

-20°C to 55°C, 20% to
93% RH (non-condensing)

Print Speed

- 152mm/s
- Upgradable to 200mm/s
- High-speed printing with smooth
paper feeding
- Toggle-Type Paper Jam Release
Lever
- Auto-centering printing
- Supports smaller labels
- Automatic media detection
- (Instantly recognizes loaded
paper/media)
- Crisp print quality | Stable
performance

1.5" Color Screen
Jumbo Roll Capacity
Visible Paper Tray
Rear-Load
Large Gears
Less Wear
Longer Life
Easy to Use